

ABOUT ZIPWAKE

We're proud to present Zipwake, the new, Dynamic Trim Control System that's set to revolutionize the boat world. Featuring an advanced, intuitive control system and a stunning new innovative design, Zipwake delivers a more comfortable ride, better performance and improved fuel consumption – whatever the conditions.

NEED A REASON
TO INSTALL ZIPWAKE?
HERE'S FIVE.

COMFORT AND SAFETY

Dynamically eliminates uncomfortable and dangerous boat pitch and roll.

PERFORMANCE AND FUEL ECONOMY

Automatically minimizes wave resistance and saves fuel.

INTUITIVE AND PRECISE CONTROL

Innovative 3D controls provide unmatched control of running trim, heel or heading.

DURABLE AND EFFECTIVE

Patented series of durable fast-acting interceptors provide supreme lift force characteristics.

COMPLETE AND COMPETITIVE

All-inclusive mass-produced modular design provides built-in quality, simple installation and easy expansion, whilst making the system affordable.

For more information, please visit

www.zipwake.com

Zipwake AB

Hälleflogdregatan 12 SE-426 58 Västra Frölunda Sweden
Tel: +46 (0)31 24 77 75 E-mail: hello@zipwake.com

ZIPWAKE
CHOOSE COMFORT. ENJOY PERFORMANCE.


DYNAMIC TRIM CONTROL SYSTEM



ZIPWAKE
CHOOSE COMFORT. ENJOY PERFORMANCE.





ZIPWAKE DYNAMIC TRIM CONTROL SYSTEM **SERIES S**

Zipwake, the world's first inexpensive dynamic trim control system, incorporates a state of the art series of durable, fast-acting interceptors, eliminating the well-known trim problems of planing and semi-planing boats. The system is fully automatic and significantly enhances performance, fuel economy, comfort and safety when accelerating, turning or running in a seaway.

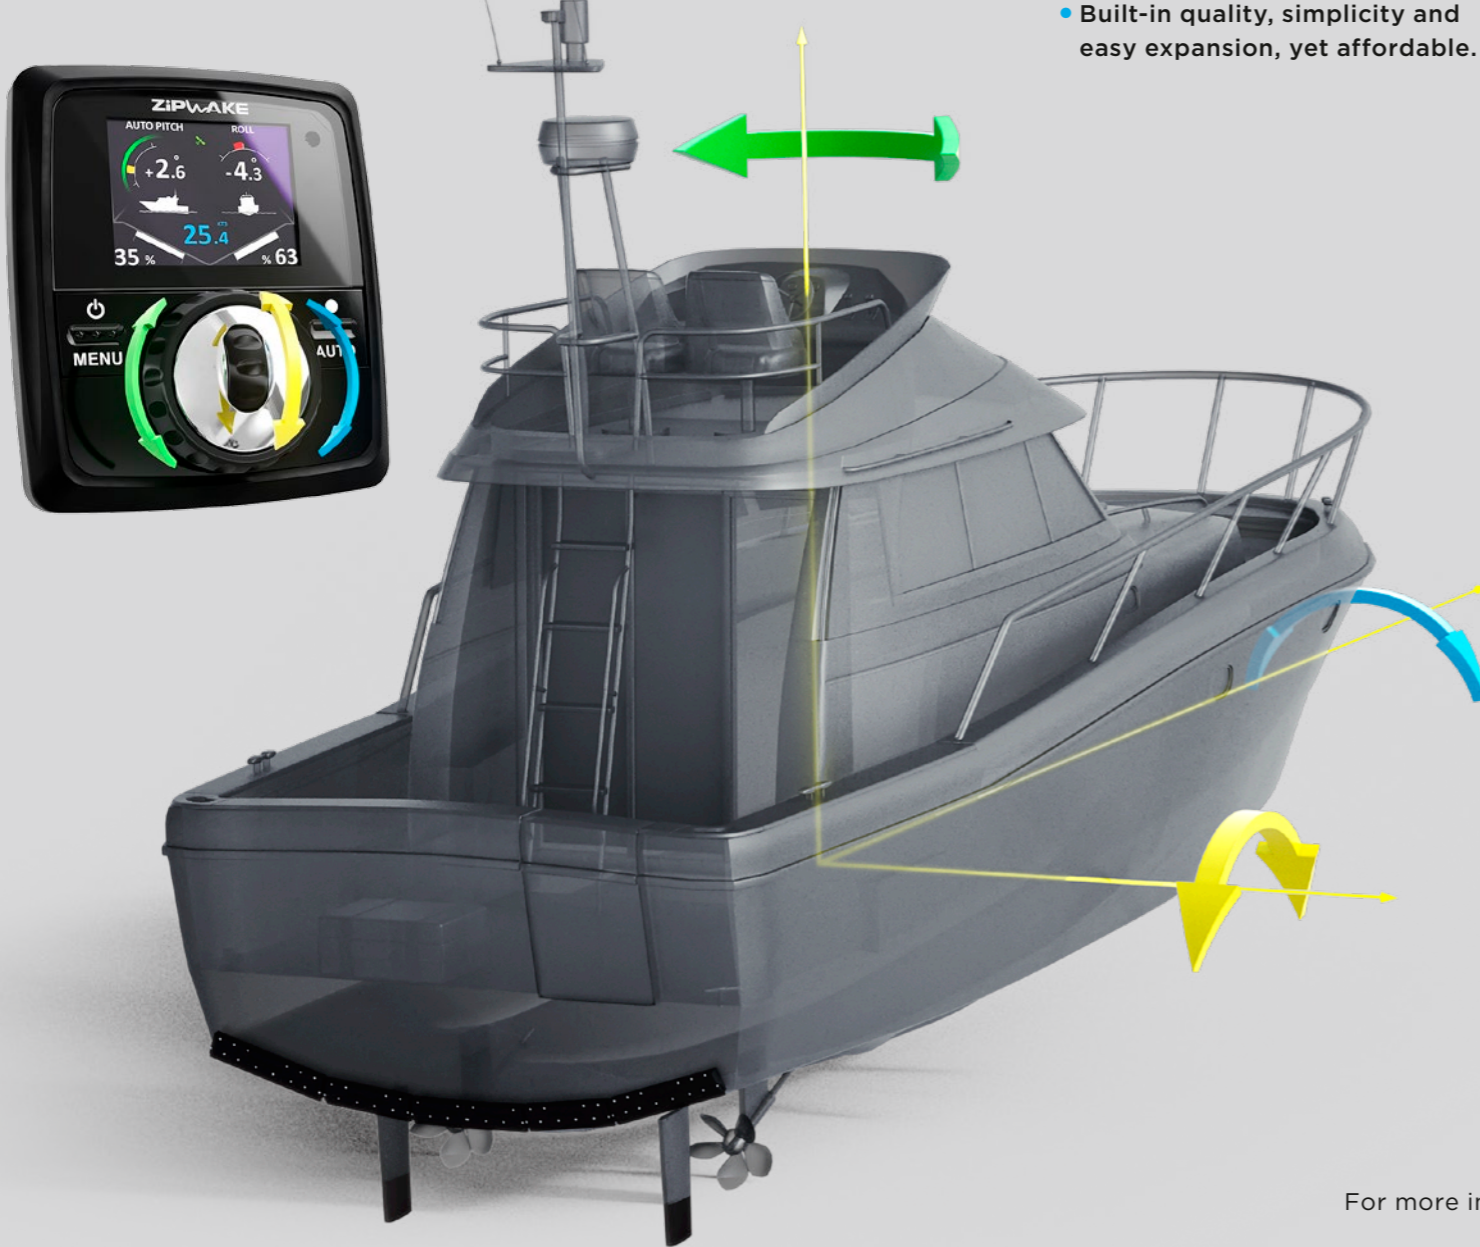

KEY FEATURES

- Dynamically eliminates uncomfortable and dangerous boat pitch and roll.
- Automatically minimizes wave resistance and saves fuel.
- Built-in quality, simplicity and easy expansion, yet affordable.

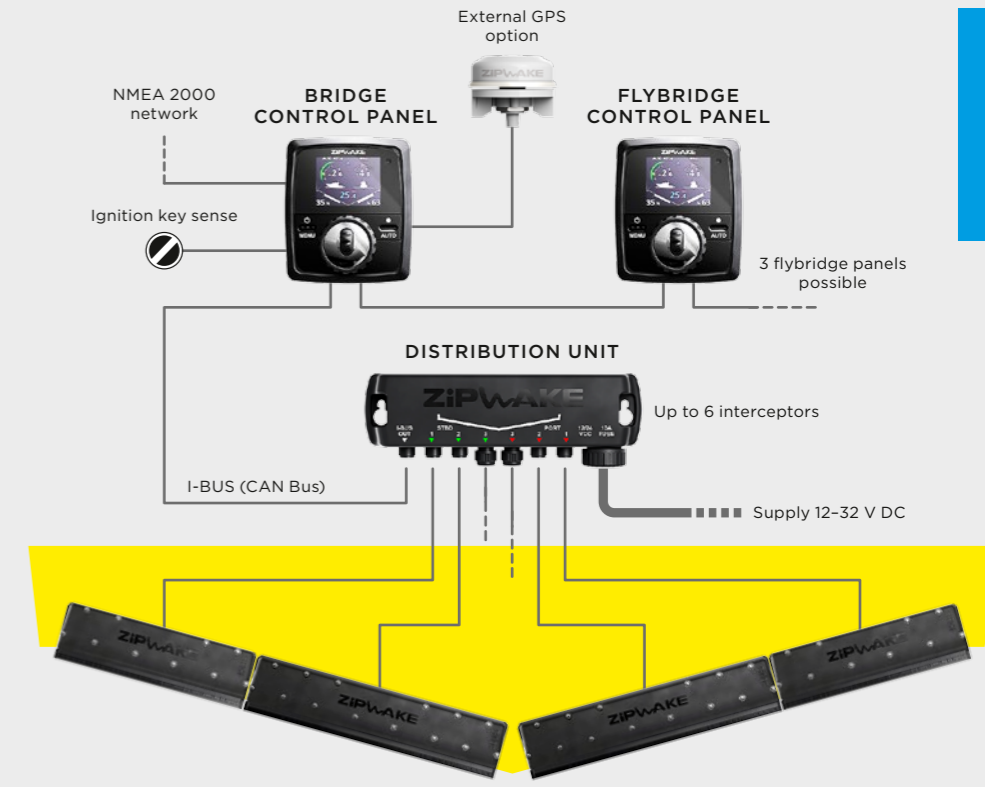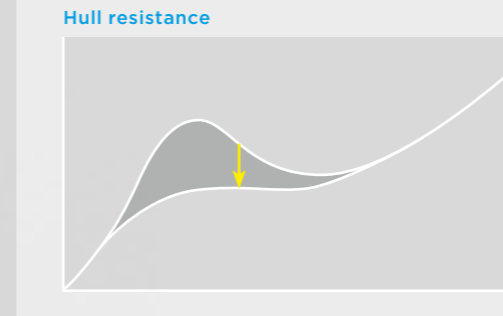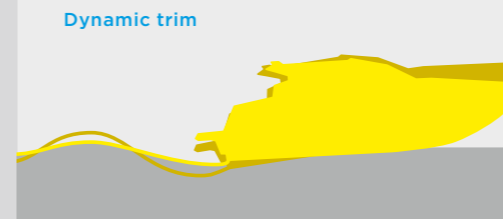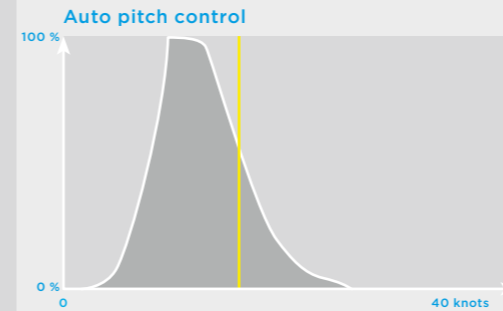


SMART RIDE CONTROLLER

Model	CP-S
Weight	0.22 kg
Mounting	Flush or surface
Supply Voltage	12-32 V DC
Power Consumption	10 W max
Waterproof Rating	IP67/IP64 (front/back)
Operating Temperature	-20° to +85°C (-4° to +185°F)



- GPS
- 3D ACC
- 3D GYRO

STATE OF THE ART INTERCEPTORS

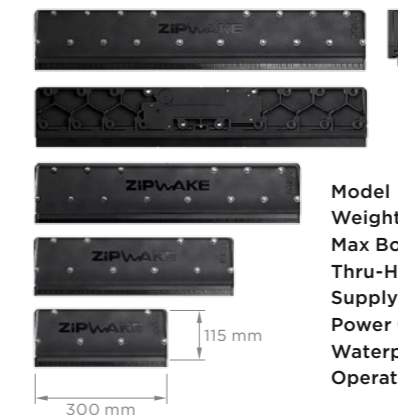

Model	IT300-S	IT450-S	IT600-S	IT750-S
Weight	2.1 kg	2.8 kg	3.5 kg	4.0 kg
Max Boat Speed	60 knots			
Thru-Hull Cable Fitting	Concealed or above waterline			
Supply Voltage	12-32 V DC			
Power Consumption	25 W max			
Waterproof Rating	IP68, 5 m			
Operating Temperature	0° to +40°C (+32° to +104°F)			

For more information please visit www.zipwake.com